


Decorative Curtain Poles





Motorised Curtain Pole System

Silent Gliss® 6150M Metropole 50mm

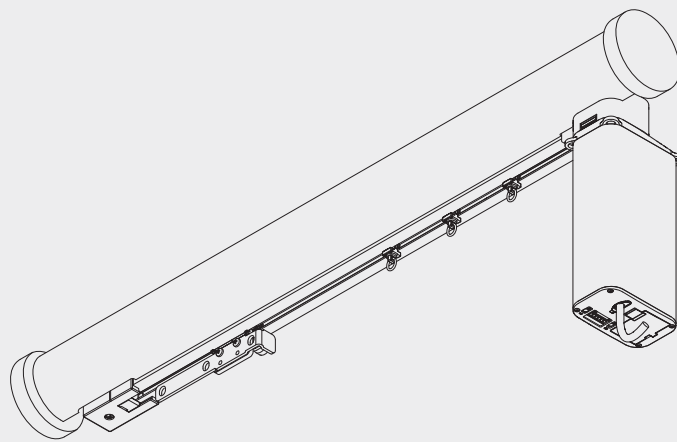

Product Information


- Electrically operated system for domestic and contract applications
- Choice of 6 different finishes - black, white, steel grey, antique bronze, taupe and silver
- Accessorised with matching end caps or finials
- Easy fitting to wall and ceiling
- Maximum curtain weight dependant on motorised system selection
- Suitable for use with Wave Standard curtain heading system
- Max pole length 5m/10m dependant on motorised system selection
- Available with 2 motor options with various operating methods



6150M

Profile Information

Metropole Fascia Profile




0360



Cannot be bent.

System 5600 Profile




10850



Cannot be bent.

System 5100 Autoglide Profile



10925



Cannot be bent.

Specification Guide - download from www.silentgliss.co.uk (password required)


Silent Gliss 6150M curtain track, electrically operated, aluminium, assembled complete with gliders 6098/6143 and 2 endcovers 0350. Face fix with bracket 0537/ 3134/2-36/2/ 0334/ top fix with bracket 6138P2/ 0335 each screwed to timber/plugged and screwed to block-work/concrete at 1000mm centres. Finished in white, black, steel grey, antique bronze, taupe and silver. Refer to table for motor colour see Motor Options in this catalogue.

How To Measure




Profile Cross Section


6150M



6150 with System 5100 Autoglide




6150 with System 5600 Autoglide

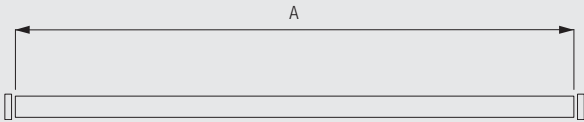


A: System Width - EXCLUDES finials (for finial width see Design Options in this catalogue)

Stack Size Calculation Wave Standard

Wave standard



Glider-cord spacing	Curtain hook spacing	Approx. curtain fullness	Stack depth (a)	Stack width (b)	Min distance (c)
6	10	2.1	10	23 per metre of track + endpiece	8
6	12	2.3	12	23 per metre of track + endpiece	9
8	14	2.1	14	18 per metre of track + endpiece	10
8	16	2.3	16	18 per metre of track + endpiece	11



Wave standard with roller gliders

Glider-cord spacing	Curtain hook spacing	Approx. curtain fullness	Stack depth (a)	Stack width (b)	Min distance (c)
8	14	2.1	14	21 per metre of track + endpiece	10
8	16	2.3	16	21 per metre of track + endpiece	11

a = Stack depth
b = Stack size
c = Min. distance

(dimensions in cm)

Note: Minimum distance (c) includes a standard 3cm clearance (front and back).

All weight calculations are based on underslung curtains. Headings above the glider channel are not recommended.



6150M

System Dimensions


Maximum Curtain Weight Chart

	Application with Rollers		Application with Rollers and Wave Rollers		
	5100		5600		
	3 m	5 m	2 m	4 m	6 m
	20	25	25	45	45
	20	25	25	45	45

Note: Maximum recommended curtain weight for Wave curtain heading system is 2.5kg per metre unless using optional wave roller gliders


Design Options

Endcaps

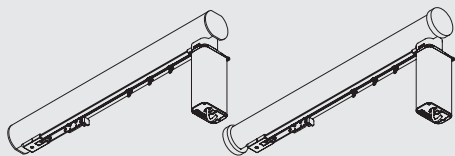


Without finials, poles are supplied as standard with flush fitting endcaps 0350 (left). Alternatively, stud endcaps 0714 (right) can be selected at no additional cost.

Finials



Finials are decorative elements that fit on at the end of the pole.

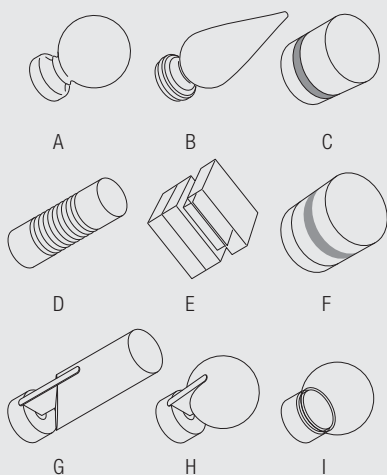


- A: 0717 Ball End 125mm
- B: 0718 Real Wood Spear 150mm
- C: 0697 Strata 65mm
- D: 0630 Groove Cylinder 125mm
- E: 0898 Crystal Cube 55mm
- F: 0899 Crystal Cylinder 55mm
- G: 0315 Fused Barrel 121mm (walnut/oak/matched)
- H: 0327 Fused Ball 81mm (walnut/oak/matched)
- I: 0333 Glass Ball (clear/frosted) 70mm



6150M

Wave Standard curtain heading system




Wave is an exciting contemporary curtain heading system which allows curtains to hang in a continuous wave which is smooth, simple and elegant.

When using the Wave curtain heading system please note the maximum recommended curtain weight is 2.5kg/m. A greater weight may be achieved using wave roller glider 6098W (refer to System Dimensions).

Wave is available on System 6150 when using both System 5100 Autoglide and System 5600.

Wave parts - when using System 5100 Autoglide

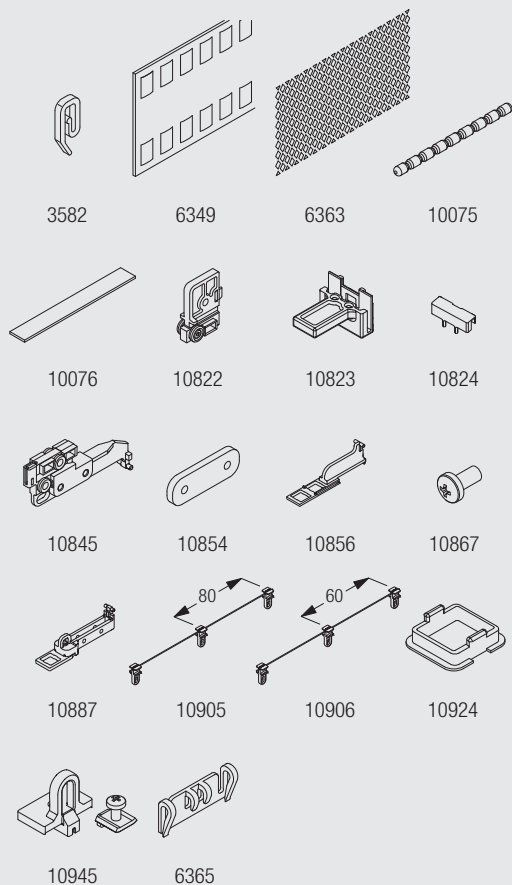

- 10822 Master carrier set
- 10823 Belt connector arm
- 10824 Belt connector pin
- 10845 Wave master carrier, single stack
- 10854 Wave overlap arm support
- 10856 Wave end stop, belt return
- 10867 Panhead screw
- 10887 Wave overlap arm set
- 10905 Wave glider cord (80mm)
- 10906 Wave glider cord (60mm)
- 10924 Wave glider support
- 10945 End stop

The following parts are supplied as standard when Silent Gliss curtains are supplied with the system. If only the track is supplied these are available at an extra cost:

- 6349 Curtain tape
- 3582 Hook
- 6363 Iron tape
- 10075 Lead weight 50gr/m
- 10076 Fabric weight


Notes:

Single stack 60mm Wave is not recommended.
Wave 80mm requires bracket 3136 minimum.



6150M

Wave - using System 5600

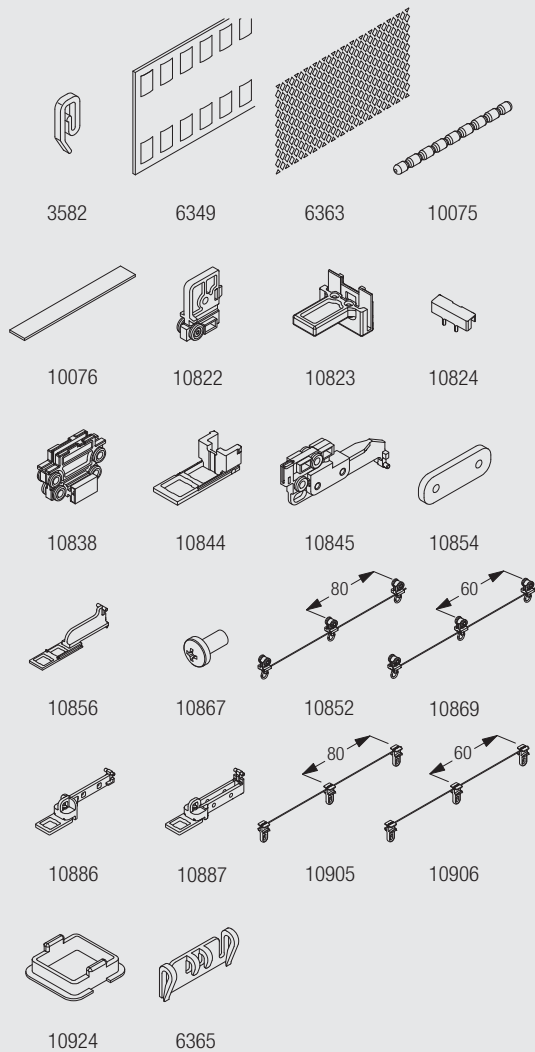

- 10822 Master carrier set
- 10823 Belt connector arm
- 10824 Belt connector pin
- 10838 Pilot runner set
- 10844 Motor end stop
- 10845 Wave master carrier, single stack 80mm
- 10852 Wave roller cord (80mm)
- 10854 Wave overlap arm support
- 10856 Wave end stop, belt return
- 10867 Panhead screw
- 10869 Wave roller cord (60mm)
- 10886 Wave overlap arm, pilot runner
- 10887 Wave overlap arm set
- 10905 Wave glider cord (80 mm)
- 10906 Wave glider cord (60 mm)
- 10924 Wave glider support

The following parts are supplied as standard when Silent Gliss curtains are supplied with the system. For hardware only orders these are available at extra cost:


- 10075 Lead weight 50gr/m
- 10076 Fabric weight
- 3582 Hook
- 6349 Curtain tape
- 6363 Iron tape

Note: Single stack 60mm Wave not recommended.


6150M

Fitting Information

Bracket Positioning using Maxi Bracket 0334 (standard)

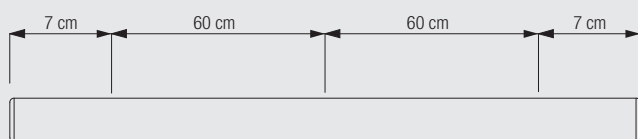

Fitting of track to bracket

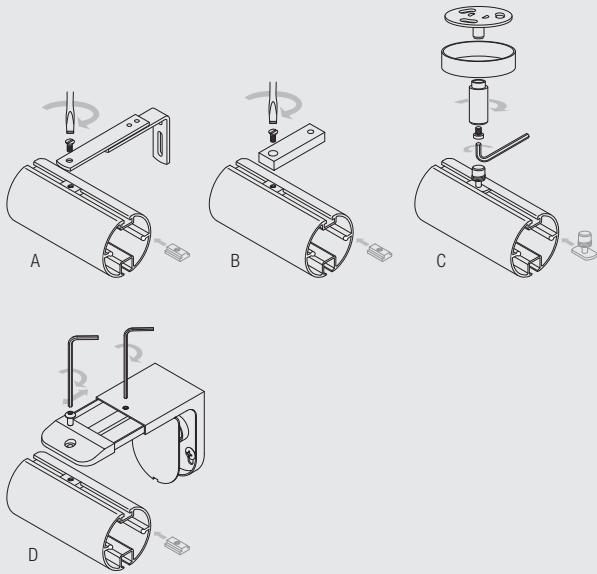


- A: Using adjustable bracket 0537
- B: Using ceiling fix bracket 6138p
- C: Using top fix bracket 0335
- D: Using maxi adjustable bracket 0334


All 50mm Metropole are supplied with Maxi bracket 0334 as standard unless otherwise specified.

Fitting Options


Wall fix with adjustable brackets 0537

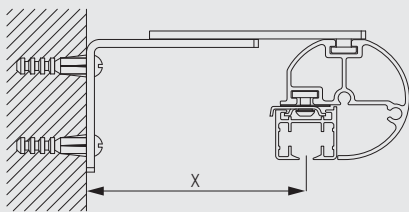

X(mm)
80-100




0537
Adjustable bracket




6141
Track insert (uses
screw 0798)


Ceiling fix with bracket 6138p2



X (mm)
6138P2 80



6138P2 (9mm)
Ceiling support set




6141
Track insert (uses
screw 0798)

The distance 'x' will depend on the curtain style and any other obstacles. For Wave XL 'x' should be a minimum of 22cm in order for the fabric not to touch the wall.




6150M


Ceiling fix using top fix bracket 0335



	X (mm)
0335	50




0335
Top fix bracket




6141
Track insert (uses
screw 0798)

The distance 'x' will depend on the curtain style and any other obstacles. For Wave XL 'x' should be a minimum of 22cm in order for the fabric not to touch the wall.


Wall fix with 3134/2 - 3136/2



	mm
3134/2	52
3135/2	72
3136/2	92




3134/b
Midial ceiling fix
bracket




6141
Track insert (uses
screw 0798)


Wall fix with maxi adjustable bracket 0334

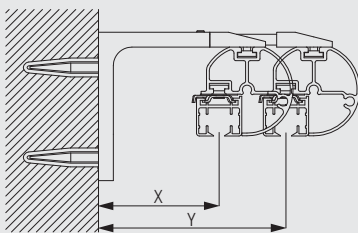

	X (mm)	Y (mm)
0334	80	100



0334
Maxi adjustable
bracket



6141
Track insert (uses
screw 0798)

6150M
















Standard Accessories

Parts

0334	Maxi adjustable bracket		0350	Flush endcap (50mm)	
0360	Profile		3825	Clamp (35mm)	
6086	Spring stop		10850	Profile	
10925	Profile				

Optional Accessories









Parts















6138P2 (9mm)	Ceiling support set		0315	Fused barrel (50mm)	
0327	Fused ball (50mm)		0333	Glass ball (50mm)	
0335	Top fix bracket		0537	Adjustable bracket	
0630	Groove Cylinder (50mm)		0697	Strata (50mm)	
0713	Midial connecting bracket		0714	Stud End cap (50mm)	
0717	Ball end finial (50mm pole)		0718	Spear finial (50mm pole)	
0898	Crystal Square (50mm)		0899	Crystal Cylinder (50mm)	
6007	Endstop		6098	Roller glider with eye	
6143	Glider 6144 in strip form		6283	Roller glider	
3134/2	Pole extension bracket (60mm - all colours)		3135/2	Pole extension bracket (80mm - all colours)	
3136/2	Pole extension bracket (100mm - all colours)				

6150M

Wave Accessories

The Wave parts listed below may apply to one or both Systems 5100 and 5600. Some parts are used on both, some are used on one or other of the systems.

3582	Hook		6007	Endstop	
6349	Wave curtain heading tape		6363	Top hemming tape	
10075	Lead weight 50 gr/m		10076	Fabric weight	
10822	Master carrier set		10823	Belt connector arm	

10824	Belt connector pin		10838	Pilot runner set	
10844	Wave end stop, motor		10845	Wave master carrier, single stack 80mm	
10852	Wave roller cord (80mm), 6.5mm channel		10854	Wave overlap support arm	
10856	Wave end stop, belt return		10867	Panhead screw M4x16	
10869	Wave roller cord (60mm), 6.5mm channel		10886	Wave overlap arm, pilot runner set	
10887	Wave overlap arm set		10905	Wave glider cord (80mm), 6.5mm channel	
10906	Wave glider cord (60mm), 6.5mm channel		10924	Wave glider support	


Motor Options

Motor Colours

The motors are hidden behind the curtain, however, visible motor parts (the small top section), is colour matched to the profile.

Option 1: System 5100 Autoglide with motor 5190


6150M

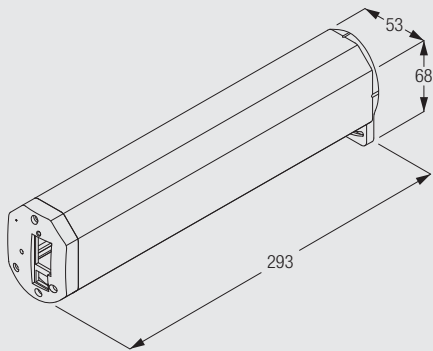

- Torque: 1.0Nm
- Speed: 130rpm
- Speed: 15cm/S
- Voltage: 100 - 240 V AC 50/60 Hz
- Power: 72W
- Safety class: IP20
- Noise level: < 45 dBA (30cm)
- Thermal overload protection
- Temperature for operation: 0°C to + 60°C
- Frequency receiver of Motor: 433.92 MHz

The motor 5190 is supplied with a 5m power cable with a 3 pin plug.

Option 2: System 5600 using Motor 9060 (100-250V AC & 24V DC)

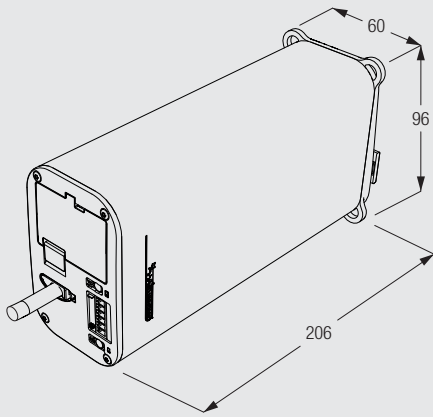

- Voltage: 100-250V AC
- Frequency: 50-60Hz
- Current: 1.3/0.45A
- Speed: 160/120rpm
- Noise level: <36 dBA
- Thermal overload protection
- ETL/UL, CE/IECEE Standard
- Weight: 1.4kg

Important: For Radio Control system 0450 order module 9063, Radio Control system 9940 order module 9063EL.

For further information on the above electric track systems please refer to the Electric Curtain Track Systems catalogue (www.silentgliss.co.uk).



6150M



6150M



6150M

www.silentgliss.co.uk
www.silentglissglobal.com

Silent Gliss Ltd
Pyramid Business Park
Poorhole Lane
Broadstairs
Kent
CT10 2PT
Great Britain

Tel: +44 (0) 1843 863571
Fax: +44 (0) 1843 864503
info@silentgliss.co.uk

Silent Gliss Global Ltd
Pyramid Business Park
Poorhole Lane
Broadstairs
Kent
CT10 2PT
Great Britain

Tel: +44 (0) 1843 874250
Fax: +44 (0) 1843 874457
info@silentglissglobal.com